

ProAlign[®]

Alignment Systems

NEW!



HUNTER
Engineering Company

Alignment measurements in just minutes!

Pronto digital imaging technology offers shops alignment service optimized for speed and efficiency with simple operation and low cost of ownership.

Digital cameras measure the position and orientation of the wheels with pinpoint accuracy using reflective targets.



step

1

Select the vehicle



- ✓ Recall specifications

step

2

Measure angles



- ✓ Install targets
- ✓ Capture measurements
- ✓ Review "before" results

step

3

Make adjustments



- ✓ Follow the adjustment instructions
- ✓ Print before-and-after results

Present your results!



- ✓ Sell more alignments
- ✓ Generate greater profits

Perform alignments at ANY height

The versatility of the Pronto digital imaging system allows shops to perform alignments on the floor or at any lift height.



Camera height is easily adjusted from the back of the unit.

Reduce long-term cost of ownership


The reflective wheel targets provide a low cost of ownership and require virtually no maintenance.

- ✓ No electronics at the wheel
- ✓ No cables or batteries
- ✓ No calibration required
- ✓ No downtime from accidental drops

Self-centering adaptors easily handle wheels up to 24 in. (28 in. with optional extensions).



Patented software features reduce alignment times and increase productivity!

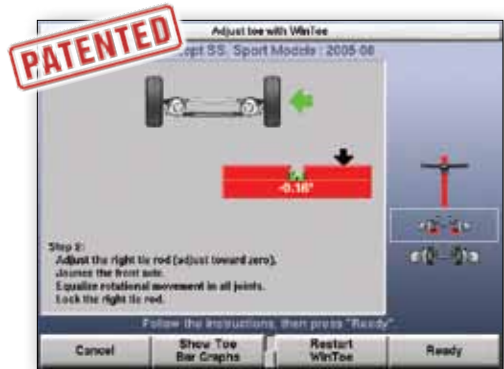

WinToe®

Ensure a straight steering wheel every time without repeated adjustments or using a steering wheel holder.


+ A time saver on nearly every alignment.



Control Arm Movement Monitor®

Cut adjustment times in half for front-shim, dual-cam or dual-slot vehicles. Step-by-step graphics let you get it right on the first try.


+ Over 60 million vehicles benefit.

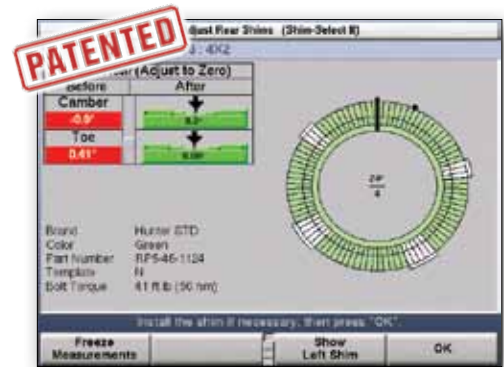

Shim-Select® II

Eliminate confusing shim charts and tables. Shim Select II quickly calculates and displays the template you need for proper shim installation.

+ Over 30 million vehicles benefit.

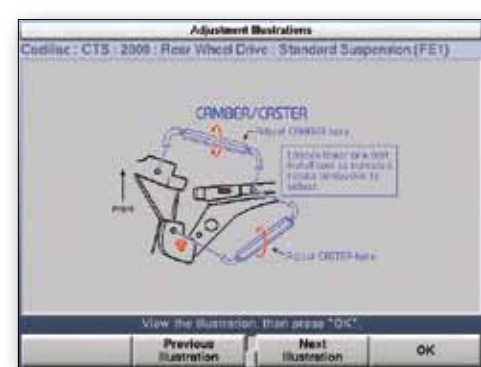

Easy-To-Follow Illustrations

Over 500 adjustment illustrations provide diagrams and instructional information of recommended OEM adjustment methods.

ProAlign® printouts help sell work

Explain needed parts and repairs and show completed work to customers using detailed, color-coded printouts.

+ Clear and detailed printouts help you communicate and build rapport with your customers and sell more alignments.



Hunter's conventional alignment system provides speed and accuracy at an economical price!



EXCLUSIVE

Reversible setups!

+ Interchangeable front and rear sensors avoid obstructions such as air dams or spoilers.



Traditional toe arms in front...



... or mounted in rear to avoid obstructions!



Pro-Comp® Compensation

Continuous runout compensation procedure ensures accurate alignment angles, even if wheels rotate after compensation.



No cords or cables!

No cumbersome cables to connect. Just grab and go!



Fast measurement readings!

Obtain precise data measurements for toe, toe-out-on-turns, track width and wheelbase in real-time.



Quick Recharge!

No unnecessary downtime. Sensors recharge while they are mounted on the aligner.



Weights less than 7.5 lbs.!

Engineered with your technician in mind, DSP700 sensors are up to 50% lighter than previous models.

Greater versatility helps service more vehicles

DSP700 sensors utilize Hunter's innovative self-centering wheel adaptor.

- ✓ Easy to use
- ✓ Lightweight, durable construction
- ✓ Fits a wide range of wheel configurations and sizes




Adaptable rim studs
Fits steel or specialty rims with run-flat and flange-guard tires.



Sturdy design
Durable, lightweight design provides rigidity and stability.



Extended range
Stud slots extend coverage from 10 to 24.5 inches.

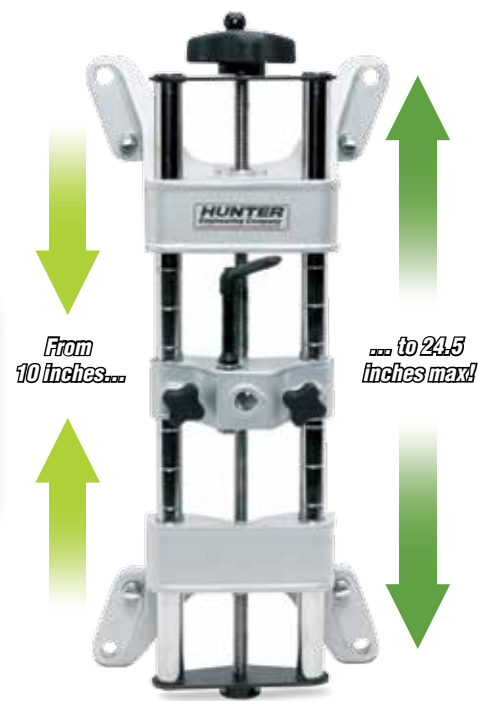


Extend range of service with these options

Tire Clamp Adaptor Fits Difficult Wheels

OPTIONAL



- ✓ Fastens to tires with 21- to 40-inch outside dimension
- ✓ Includes 4 tire clamps with protective rim sleeves

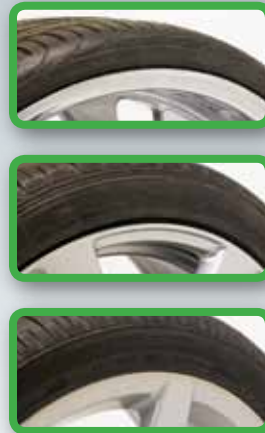

Ideal for use on wheels without rim lips or when space between tire and rim is limited.

Extensions Expand Coverage

OPTIONAL



- ✓ Expands adaptor range up to 28 inches
- ✓ Includes 16 adaptor extensions, 4 for each adaptor

Camera configurations

Ordering Information:

Pronto Includes ProAlign alignment software, 17-in. LCD flat panel, column/wall-mount console with color printer, manual-lift, fixed-column HS200ML 2-camera sensors, and standard hexagonal targets.

Pronto-II Includes ProAlign alignment software, 17-in. LCD flat panel, mobile console with color printer, manual-lift, fixed-column HS200ML 2-camera sensors, and standard hexagonal targets.

Pronto-III Includes ProAlign alignment software, 17-in. LCD flat panel, mobile console with color printer, manual-lift, console-mounted HS200CM 2-camera sensors, and standard hexagonal targets.

Standard Accessories:

Infrared Remote Control
Brake Pedal Depressor
Steering Wheel Holder

Specifications:

Track Width: 80 in. front, 112 in. rear

Wheelbase: 180 in.


Console Dimensions:

Mobile:
59.5 in. (H) x 23 in. (D) x 22.5 in. (W)

Column/wall-mount:
39.5 in. (H) x 17 in. (D) x 19.5 in. (W)

Power Requirements: 100-240V, 10A, 50-60Hz

Pronto

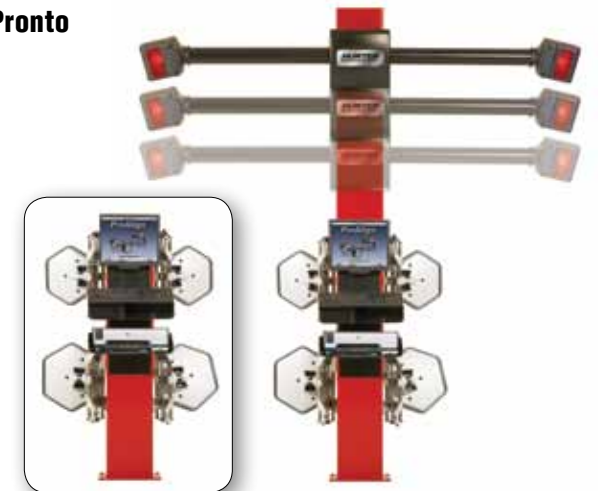

Alternative console mounting base available (20-2313-1)

Pronto-II



Pronto-III



Portability allows service of multiple alignment bays

Conventional sensor configuration

Ordering Information:

Presto:

Includes ProAlign alignment software, 17-in. LCD flat panel, mobile console with color printer, DSP700 cordless sensors.

Standard Accessories:

Infrared Remote Control
Brake Pedal Depressor
Steering Wheel Holder



Specifications:

Track Width: 80 in. front, 112 in. rear

Wheelbase: 180 in.

Console Dimensions:

Mobile:
59.5 in. (H) x 23 in. (D) x 22.5 in. (W)

Power Requirements: 100-240V, 10A, 50-60Hz

Upgrades and Accessories

Options:

Icon Remote Indicator	30-419-1
Icon Cordless Remote Indicator	30-421-1
Standard Turnplate (2 required)	25-140-1
Stainless Steel Turnplate (2 required)	25-129-1
Alternative Mounting Base (Pronto)	20-2313-1



The optional Icon Remote Indicator provides the operator with complete control while making adjustments to the vehicle. Available in conventional or cordless models.

Many Hunter alignment systems are upgradable. CodeLink requires WinAlign software 11.0 or greater. See your Hunter sales or service representative for more information. Specifications, models and options are subject to change without notice.



For additional information on WinAlign 11, see Form 5908-T.

HUNTER
Engineering Company
www.hunter.com

0810AAP5M.42